
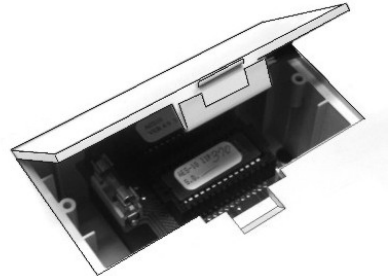
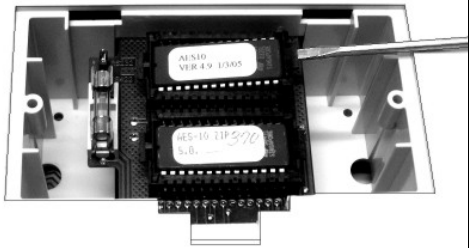




Rate Installation Instructions

AES30, AES30D

Step	Action / Comments	
1	Unplug the scale from both the meter and power adapter.	
2	Open the access cover on the bottom of the scale.	
3	<p>Remove the Rate EPROM from the socket by pulling up on the two tabs of the EPROM carrier.</p> <p>If the EPROM does not come up easily, gently pry up on the tabs using a screwdriver.</p> <p>Note: Do not remove the ZIP EPROM.</p>	
4	<p>Press the new Rate EPROM into the socket. Do not use excessive force.</p>  <p>Make sure you are using the correct IC by checking the label on the EPROM as shown above. If you are installing rates on an AES30D make sure the label reads AES30D. The scales are different; their IC's are NOT interchangeable.</p>	<p>EPROM software versions:</p> <p>AES30 – 1.6 AES30D – 30.8</p>
5	Place the access cover back into the scale and snap it back into place.	
6	Reconnect the scale to both the meter and power adapter.	

The new rates have now been successfully loaded.